



| | |
|----------|--|
| Client: | |
| Order #: | |
| Project: | |
| Type: | |

DESCRIPTION

Deco's bold Ignite architectural bollard provides crisp, uniform light and eliminates shadows and scalloping in all pathway applications. For use in entryways, parks, schools, apartment complexes, municipal buildings, hospitals, shopping malls and all exterior commercial and residential buildings.

FEATURES

- Provides 360° of low level lighting, Type VS distribution.
- Standard color is bronze; also available in black.
- Extruded aluminum housings with flush mounting base.
- IP67 for wet locations.
- Vandal resistant screws.
- System Wattage: 20.2W
- Clear polycarbonate lenses.
- Includes Mounting Kit with 8" Anchor Bolts

PERFORMANCE DATA

CRI

80+

CCT

4000K

Projected Lifetime

187,000 Hours (L70)

Dimming

0-10V Dimming Standard,
10% down to 100%

Operating Temperature

-40°C to +55°C Ambient

Warranty

5 year Standard
10 year Optional

ORDERING INFORMATION

| | | | | | | | | |
|---------------|----------|----------|----------|----------|----------|----------|----------|--|
| IGNITE | | | | | | | | |
| | B | C | D | E | F | G | H | |


| | | | |
|----------|-----------------------|--------|-----------------------|
| A | FIXTURE SERIES | Ignite | Architectural Bollard |
| B | WATTAGE/LUMENS | 20 | 20W/1539 ² |
| C | CCT | 40 | 4000K |
| D | VOLTAGE | UNV | 122-277V |
| E | FINISH | BZ | Bronze ¹ |
| | | BL | Black |

| | | | |
|----------|-----------------------------|-----|----------------------------------|
| F | HEIGHT | 43 | 43" |
| G | OPTIONS | E | Emergency |
| | | PC1 | Photocell (120V only) |
| | | PC2 | Photocell (277V only) |
| | | WSF | Wired Single Fuse |
| | | WDF | Wired Double Fuse |
| H | WARRANTY³ | - | 5 Year Warranty |
| | | 10 | 10 Year Warranty |
| | | 10L | 10 Year Warranty including labor |

¹ Standard color
² Delivered Lumens (4000K)
³ 5 Year Warranty is Standard unless specified




DIMENSIONS

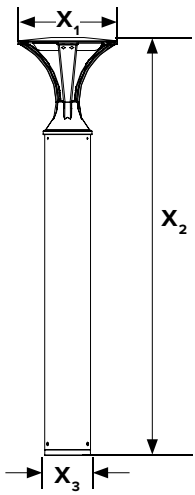

| | Inches |
|----------------------|--------|
| X₁ | 10.25 |
| X₂ | 43.125 |
| X₃ | 4.75 |


PHOTOMETRICS

Polar Graph- 20W 4000K

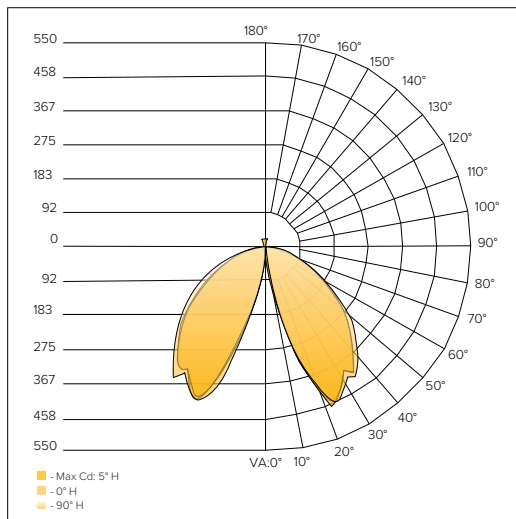

Delivered Lumens: 1539
CRI: 80

Isolux-Plot

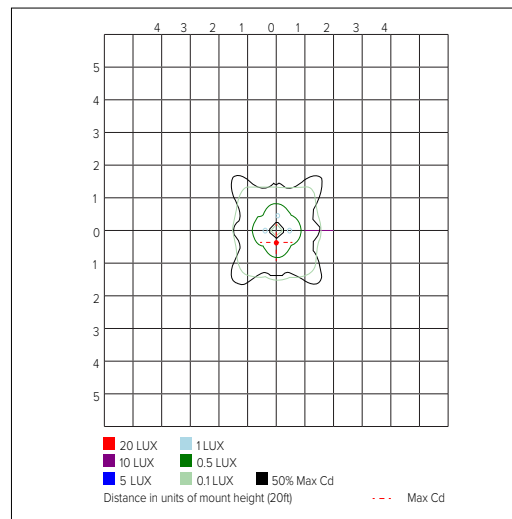

GFCI OUTLET



Close



Open

ANCHOR BOLT INSTALLATION

