



Client:	
Order #:	
Project:	
Type:	

**DESCRIPTION**

The RSWP-LED small wall pack features a low-profile, compact design ideal for security, accent and perimeter lighting in areas such as building facades, entrance ways, garage doors, indoor parking garages, tunnels, overpasses and alleys. Available as a build-to-order fixture or in a Quickship model (see Page 3 for ordering code).

**FEATURES**

- Traditional styling paired with next-generation LED performance at 111 lm/W
- Heavy duty two piece, die-cast aluminum housing.
- Type IV light distribution
- Silicone gasketing provides protection against moisture.
- Mounts directly to 3.5" octagon or 4" square outlet box.
- .5" NPS tapped holes provided in three locations for surface conduit entry or optional photo control.
- Dark bronze polyester powder coated finish for impact, corrosion and UV resistance.
- CSA listed for wet locations, IP55 rated
- Integral cast-in aluminum hinges permit complete removal of lens frame assembly without tools.
- Clear prismatic borosilicate glass refractor is thermal and shock resistant.
- DLC listed for utility rebates (see table on pg 3 for models listed)

**PERFORMANCE DATA**

**CRI**

83

**CCT**

5000K

**Projected Lifetime**

L70 - 182,000 Hours;  
L80 - 80,000 Hours

**Dimming**

0-10V Dimming Standard,  
10% down to 100%

**Operating Temperature**

-40°C to +55°C Ambient

**Warranty**

5 year Standard  
10 year Optional

**ORDERING INFORMATION**

<b>RSWP</b>							
	<b>B</b>	<b>C</b>	<b>D</b>	<b>E</b>	<b>F</b>	<b>G</b>	<b>H</b>

<b>A</b>	<b>FIXTURE SERIES</b>	
RSWP	Small Wall Pack	
<b>B</b>	<b>WATTAGE/LUMENS</b>	
25	25W/3000 <sup>2,3</sup>	
<b>C</b>	<b>CCT</b>	
50	5000K <sup>3</sup>	
<b>D</b>	<b>VOLTAGE</b>	
U	120-277V	
<b>E</b>	<b>FINISH</b>	
BZ	Bronze <sup>1</sup>	

<b>F</b>	<b>LENS TYPE</b>	
Q	Prismatic Glass	


<b>G</b>	<b>OPTIONS</b>	
T	Photocell	
M	Mounting Plate <sup>4</sup>	
G	Wire Guard <sup>4</sup>	
H	Glare Shield <sup>4</sup>	

<b>H</b>	<b>WARRANTY<sup>5</sup></b>	
-	5 Year Warranty	
10	10 Year Warranty	
10L	10 Year Warranty including labor	

<sup>1</sup>Standard for fixture  
<sup>2</sup>Delivered Lumens (5000K)  
<sup>3</sup>DLC Listed Model (see table on Page 2 for models currently listed)  
<sup>4</sup>Shipped separately  
<sup>5</sup>5 Year Warranty is Standard unless specified




### DIMENSIONS

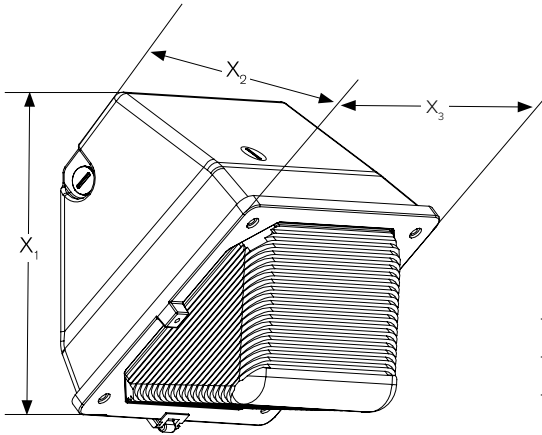


	Inches
X <sub>1</sub>	9.25
X <sub>2</sub>	8.75
X <sub>3</sub>	8.75

### PHOTOMETRICS

Model 30W 5000K

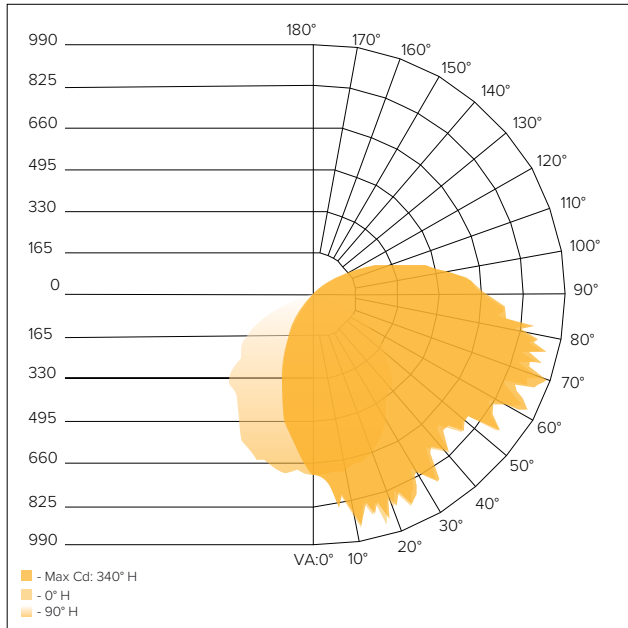

Isolux Plot

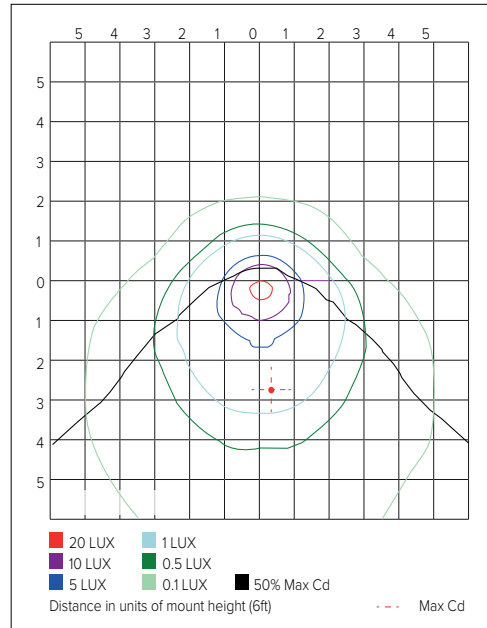

Zonal Lumen Summary

Zone	Lumens	%Luminaire
0-30	546.6	18.4%
0-40	872.3	29.3%
0-60	1,561.5	52.4%
60-90	952.2	32%
70-100	788.7	26.5%
90-120	393.9	13.2%
0-90	2,513.7	84.4%
90-180	464.7	15.6%
0-180	2,978.5	100%

### LUMEN OUTPUT

Lumen Chart

Nominal Wattage	System Wattage	5000K Lumens	Efficacy (lm/W)
25W	27	3000	111

### DLC LISTING

	25W
5000K	X

### QUICKSHIP MODEL

RSWP-LED2550UBZQ

(25W, 5000K, 120-277V, Bronze, Glass Lens, No Options)