

Client:	
Order #:	
Project:	
Type:	

DESCRIPTION

The RVSL (REVO's Vapor Shield Luminaire) is a high-powered, non-corrosive, fiberglass reinforced polyester linear ceiling mount fixture ideal for utility lighting, comes in 2ft and 4ft length configurations. The RVSL (REVO's Vapor Shield Luminaire) comes in two configurations (2F and 4F) with four Kelvin color temperatures 3000K, 4000K and 5000K. Four optical distribution patterns include General Area, Wide Area, Parking Garage, and a Clear Lens optical distribution pattern. Two types of lenses (Acrylic and Polycarbonate) are available for the Frosted Wide and Parking optical distributions. Mounting options include the Standard Stainless Steel Straps, V Hook, Surface Mount Bracket, Suspension Kit, and Top Hub.

FEATURES

- Corrosion Resistant Hardware and Housing, Vandal Resistant and Tamper Proof Options
- Controls Agnostic, Compatible with Most Control Systems
- Ideal for Parking Garages, Wash Down Areas, Industrial & Manufacturing, Covered Canopies, Pedestrian Tunnels, and Airports
- 3000K, 4000K, 5000K CCT Multichip High Power 80 CRI LEDs • IP67/IP69 Rated, IK10 Rated (Polycarbonate Lens), and IK07 Rated (Acrylic Lens) Battery Back-Up Options
- Visually Comfortable Distributions and Low-Profile Lens
- White Standard Fixture Color (Consult Factory for Custom Color)
- Reduce Energy Consumption, L70 > 100,000 hours
- Up-light Parking/Wide Distribution Option for Visual Comfort
- Buy America (n) Option Available
- Cost Competitive and Short Shipping Lead Times in Days & Weeks
- Easy to Install Mounting Options Other options include FSP-221B with Motion Sensor, Stainless Steel Latches, Tamper Proof Hardware, Vandal Resistant Hardware, Emergency Battery Backup, 20KA Surge Protector, Dual Feed Load Control Bypass Relay, and Single Fuse.

Applications include:

- Parking Garages • Covered Canopies
- Pedestrian Tunnels • Warehouses
- Stairwells • Airports • Industrial
- Security Lighting • Commercial Designed for harsh, damp, and seldom cleaned locations.

PERFORMANCE DATA

CRI

80+

CCT

3000K, 4000K, 5000K

Projected Lifetime

100,000+ Hours (L70)

Dimming

0-10V Dimming Standard, 10% down to 100%

Operating Temperature

-40°C to +55°C Ambient

Warranty

5 year Standard
10 year Optional

ORDERING INFORMATION

RVSL								
	B	C	D	E	F	G	H	

A	FIXTURE SERIES	
RVSL	REVO's Vapor Shield Luminaire	
B	WATTAGE/LUMENS 2 FOOT	
23	23W/3423 ¹	
WATTAGE/LUMENS 4 FOOT		
34	34W/5323 ¹	
54	54W/8175 ¹	
58	58W/8920 ¹	
C	CCT	
30	3000K	
40	4000K	
50	5000K	
D	VOLTAGE	
UNV	120-277V	

E	SENSOR	
BL	No Sensors	
OS	Occupancy Sensor	
FCAO	CCT Tunable Controller	
F	FINISH	
WH	White	

G	OPTIONS	
EM	Emergency Driver	
C	Conduit	
H	WARRANTY²	
-	5 Year Warranty	
10	10 Year Warranty	
10L	10 Year Warranty including labor	

¹Delivered Lumens (5000K Type 3)
²5 Year Warranty is Standard unless specified







OTHER VIEWS



DIMENSIONS

RVSL 2 FOOT

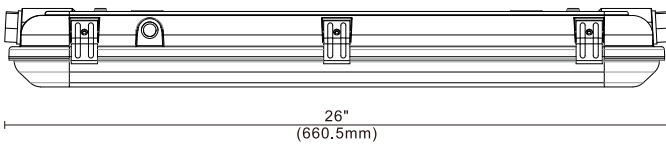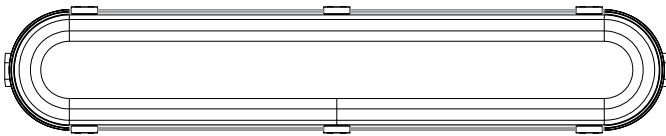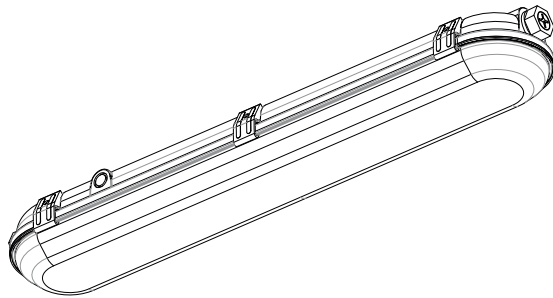

RVSL 4 FOOT

