

DESCRIPTION

Nola fixture, an elegant square high-performance light column crafted with Dark Sky Compliance and downward light distribution. Achieve optimal visual comfort with controlled optics, minimizing glare. The square design ensures a unique, wide light distribution, creating an architecturally appealing clover leaf pattern on the pavement. With its minimalistic shape, the Nola delivers distinctive lighting effects at night and serves as a decorative urban element during the day. Ideal for pedestrian areas, precincts, building surrounds, shopping centers, squares, and parks. Illuminate spaces with sophistication and style.



Client:	
Order #:	
Project:	
Type:	

FEATURES

Nola

- Conformal Coating LED light engine
- CCT: Amber, LPS (1800K), 2200K, 2700K, 3000K, 4000K, 5000K
- Static Colors Available - Contact Factory

Distribution

- Types II, III, IV, V
- Full Cutoff

ELECTRICAL

- Electronic Driver, 120-277V, 50/60Hz or 347/480V, 50/60Hz
- 0-10v Dimmable Driver
- Standard Surge Protection Included (6kV Line-Line; 10k-V Line-Earth)

CONTROLS (OPTIONAL)

- Button Eye Photo Control (PC)
- House Side Shield (H)

HOUSING

- Formed Aluminum Housing with 4 Window Panels.
- Tamper-Proof Stainless Steel Hardware.

FINISH

- Super Durable Polyester Powder Coat Finish. Custom Finishes Available, Including Patinas and All RAL Colors.

LISTINGS & RATINGS

- ETL Listed to UL 1598 Standard for Wet Location and IP66.
- LED is IP66 Rate

PERFORMANCE DATA

CRI

70+ (5000K)
80+ (4000K and lower)

CCT

3000K, 4000K, 5000K

Projected Lifetime

>100,000 Hours (L70)

Dimming

0-10V Dimming Standard,
10% down to 100%

Operating Temperature

-40°C to +55°C Ambient

Warranty

5 year Standard
10 year Optional

ORDERING INFORMATION


NOLA								
-------------	--	--	--	--	--	--	--	--

	B	C	D	E	F	G	I
A	FIXTURE SERIES		CCT		OPTIONS		
	Nola	Elegant Square Luminaire	30	3000K	N	None	
B	WATTAGE/LUMENS		40	4000K	PC	Button Eye Photo Control	
	10	10W/1420 ¹	50	5000K	H	House Side Shield	
	15	15W/2029 ¹	27	27000K	USB	Dual USB Port*	
	20	20W/2841 ¹	D VOLTAGE		GFIC	GFI In-Use Cover, Cast Aluminum*	
			UNV	120-277V	GFIP	GFI In-Use Cover, Plastic*	
			H	347/480V	G DISTRIBUTION		
E	FINISH		E FINISH		2	Type II	
	BZ	Bronze	BZ	Bronze	3	Type III	
	BL	Black	BL	Black	4	Type IV	
	DBZ	Dark Bronze	DBZ	Dark Bronze	5	Type V	
	WH	White	WH	White	I WARRANTY²		
	GR	Green	GR	Green	-	5 Year Warranty	
	SM	Silver Metallic	SM	Silver Metallic	10	10 Year Warranty	
	GY	Light Gray	GY	Light Gray	10L	10 Year Warranty including labor	
	TBK	Textured Black	TBK	Textured Black			
	CC	Custom Color	CC	Custom Color			

¹ Delivered Lumens (5000K)

² 5 Year Warranty is Standard unless specified

DIMENSIONS

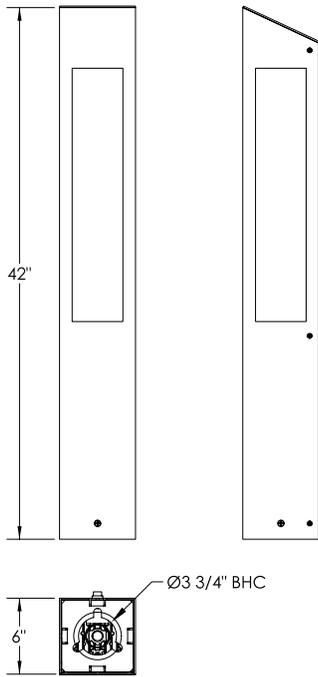

LUMEN OUTPUT

RADIANT™ LED LIGHT ENGINE SPECIFICATIONS:

Lumen Output for Austin 22 with Clear Lens					
CCT	LED Module	Type 2	Type 3	Type 4	Type 5
5K	10W5K	994	1013	1003	1058
	15W5K	1453	1480	1466	1546
	20W5K	1912	1947	1928	2034
4K	10W4K	947	964	955	1007
	15W4K	1384	1409	1396	1472
	20W4K	1821	1854	1836	1937
3K	10W3K	909	926	917	967
	15W3K	1329	1353	1340	1413
	20W3K	1749	1780	1763	1860
27K	10W27K	890	906	898	947
	15W27K	1301	1325	1312	1384
	20W27K	1712	1743	1726	1821