

DESCRIPTION

Introducing the Zenara Series, thoughtfully designed with pedestrians in mind. This post-top lamp boasts twin arms supporting a slim superstructure with diverse distribution options such as Pathway, Asymmetrical, and Symmetrical. Its elegant silhouette and customizable lighting elevate pedestrian environments, including outdoor retail spaces, courtyards, universities, and corporate campuses.

The Zenara Selectable Post Top is a cutting-edge LED luminaire designed to optimize savings, streamline installation, and adapt effortlessly. Offering 12 fixtures in 1, it provides four selectable lumen outputs for varied heights and atmospheres, along with three selectable CCT color options. Illuminate your spaces with sophistication and flexibility.

FEATURES

- **Housing**
Die-cast aluminum housing for durability
- **Ambient Temperature**
Suitable for use in -40° C to 45° C (-40° F to 113° F).
- **Mounting**
Pole mount - slips over a 2 3/8" or 3" tenon. Suitable for heights between 8-20 ft.
- **Efficacy**
Up to 151 lumens per watt.



- **CCT and CRI**
Field selectable: 3000K, 4000K, and 5000K - 70 CRI
- **Warranty**
10-year limited warranty.
- **Electrical**
Standard voltage 120-277V. HVU 347-480V. 0-10V dimming driver standard for 10% to 100% dimming capabilities.
- **Certifications**
UL Listed for wet locations. Equivalent to IP65 rating. FCC compliant. Design Lights Consortium® (DLC) 5.1 Premium qualified product.

Client:	
Order #:	
Project:	
Type:	

PERFORMANCE DATA

CRI

70+

CCT

3000K, 4000K, 5000K

Projected Lifetime

>146,000 Hours (L70)
>44,000 Hours (L90)

Dimming

0-10V Dimming Standard,
10% down to 100%

Operating Temperature

-40°C to +45°C Ambient

Warranty

5 year Standard
10 year Optional

ORDERING INFORMATION


ZENARA						
---------------	--	--	--	--	--	--

B		C		D		E		F		G	
A	FIXTURE SERIES										
	Zenara	Selectable Post-Top Luminaire									
B	WATTAGE/LUMENS RAWP-5L										
	45	45W/6700 ¹									
	70	70W/10000 ¹									
	87	87W/12000 ¹									
	130	130W/16600 ¹									
C	CCT										
	30	3000K									
	40	4000K									
	50	5000K									
D	VOLTAGE										
	U	120-277V									
	HVU	47-480V									
E	FINISH										
	WH	White									
	BL	Black									
	DB	Dark Bronze									
F	OPTIONS										
	MS-ACI-01	Motion Sensor 120-277V (Choose 1)									
	L3	2x Lens (Max 20ft Mounting Height)									
	L7	2.5x Lens (Max 40ft Mounting Height)									
	RM51	Remote Control									
G	WARRANTY²										
	-	5 Year Warranty									
	10	10 Year Warranty									
	10L	10 Year Warranty including labor									

¹Delivered Lumens (5000K)

² 5 Year Warranty is Standard unless specified

DIMENSIONS

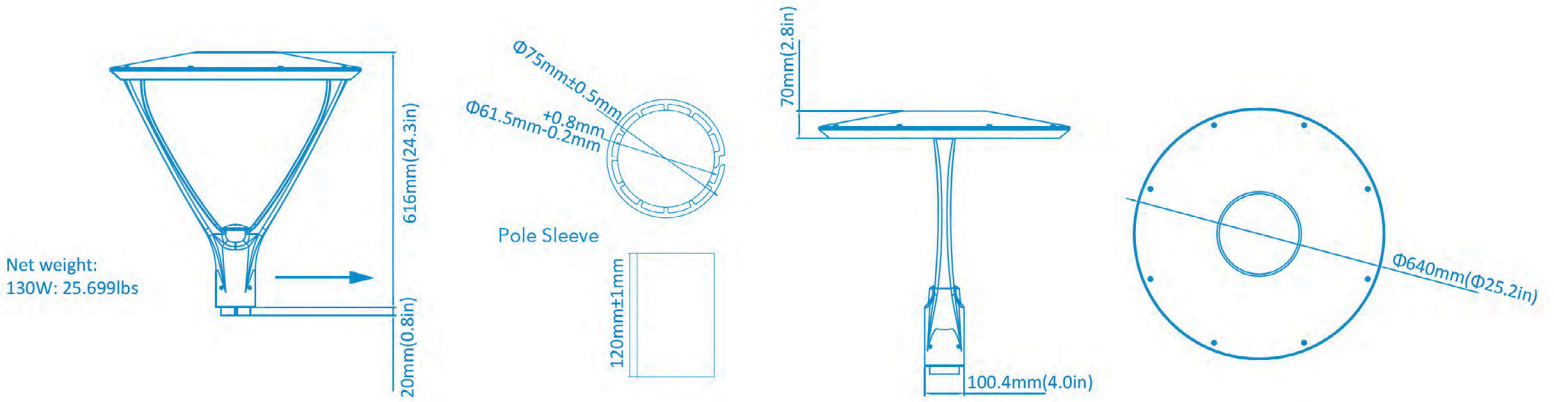

PHOTOMETRIC DATA

