



Client:	
Order #:	
Project:	
Type:	

PERFORMANCE DATA

CRI

70+

CCT

3000K 4000K, 5000K

Projected Lifetime

>173,000 Hours (L70)
>50,000 Hours (L90)

Dimming

0-10V Dimming Standard,
10% down to 100%

Operating Temperature

-30°C to +50°C Ambient

Warranty

5 year Standard
10 year Optional

DESCRIPTION

This attractive, newly redesigned heavy-duty bollard features full proof aluminum construction housing, providing corrosion and vandal resistance ideal for lighting pedestrian walkways, as well as accenting the exterior grounds of office and apartment buildings, hotel and parks. A solid foundation withstands the elements, driver options work in even the worst weather conditions.

FEATURES

- LISTING
UL and CUL listed for wet locations
- HOUSING
Consisting of an extruded aluminium alloy body
Standard 4kV Surge
- FINISH
UV stabilized powder coated finish
- LENS
High-impact polycarbonate diffuser
- OPTIONS
Anodized aluminum reflector
Finish - Bronze

ORDERING INFORMATION

RMB						
	B	C	D	E	F	G

A	FIXTURE SERIES	
	RMB	LED Bollard
B	WATTAGE/LUMENS	
	18	18W/2502 ¹
	36	36W/5004 ¹


C	CCT	
	30	3000k
	40	4000K
	50	5000K
D	VOLTAGE	
	UNV	120-277V
E	FINISH	
	BZ	Bronze

F	OPTIONS	
	XS	10kV Surge
	2S	20kV Surge
G	WARRANTY²	
	-	5 Year Warranty
	10	10 Year Warranty
	10L	10 Year Warranty including labor

¹Delivered Lumens (5000K)

² 5 Year Warranty is Standard unless specified

DIMENSIONS

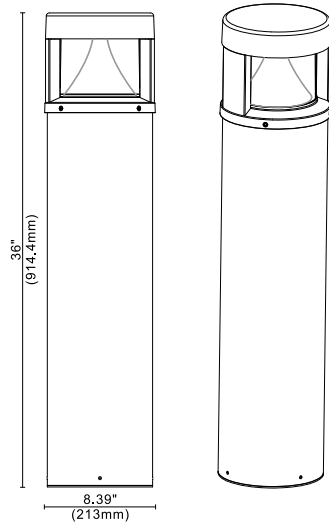

OTHER VIEWS

