

Client:	
Order #:	
Project:	
Type:	

DESCRIPTION

Introducing the RNSW Square Narrow LED Wraparound—a sleek and efficient lighting solution designed for a variety of applications. With its contemporary square design, RNSW offers focused and even light distribution, making it an excellent choice for narrow spaces such as corridors, aisles, and utility rooms. This fixture is perfect for both residential and commercial settings, providing optimal illumination for hallways, walkways, and other areas where a compact yet powerful lighting solution is needed. Illuminate your space with the modern efficiency and style of RNSW.

FEATURES

- Field selectable 3000k, 4000k, & 5000k color temperatures.*
- Long-life LEDs provide at least 86,000 hours of operation with at least 70% of initial lumen output (L70).**
- Field selectable 5,000, 6,000, & 7,000 nominal lumen levels.*
- Universal 120-277 AC voltage (50-60Hz) is standard.
- Power factor > 0.90.
- Total harmonic distortion < 20%.
- Color rendering index > 80.
- Includes round plate to cover ceiling-mounted junction box.
- Easy installation in new construction or retrofit applications.

PERFORMANCE DATA

CRI

80+

CCT

3000K, 4000K, 5000K

Projected Lifetime

>86,000 Hours (L70)

Dimming

0-10V Dimming Standard, 10% down to 100%

Operating Temperature

-40°C to +50°C Ambient

Warranty

5 year Standard
10 year Optional

ORDERING INFORMATION


RNSW						
-------------	--	--	--	--	--	--

B		C		D		E		F		G	
A	FIXTURE SERIES										
	RNSW	Narrow Square Wrap Around									
B	WATTAGE/LUMENS										
	41	41W/5108 ¹									
	59	59W/7092 ¹									
C	CCT										
	30	3000k									
	40	4000K									
	50	5000K									
D	VOLTAGE										
	U	120-277V									
E	FINISH										
	WH	White									
F	OPTIONS										
	EM	Emergency									
	SE	Sensor									
G	WARRANTY²										
	-	5 Year Warranty									
	10	10 Year Warranty									
	10L	10 Year Warranty including labor									

¹Delivered Lumens (5000K)

² 5 Year Warranty is Standard unless specified

DIMENSIONS

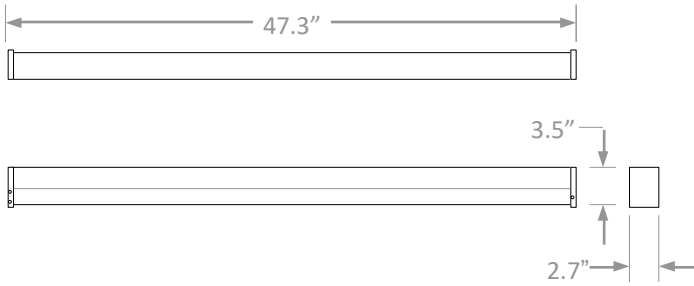

PHOTOMETRIC DATA

RNSW Narrow Square Wrap Around

Luminaire Data

Description	Wrap Light 7L, 3K
Total Lumens	6,368
Input Wattage	57
Efficacy (lm/W)	111
Spacing Criterion (0-180°)	1.56
Spacing Criterion (90-270°)	1.26

Zonal Lumen Summary

Zone	Lumens	%Fixt
0-20°	455	7.1%
0-30°	998	15.7%
0-40°	1,697	26.6%
20-50°	2,029	31.9%
40-70°	2,299	36.1%
0-60°	3,276	51.4%
0-80°	4,575	71.8%
0-90°	4,996	78.5%
90-180°	1,372	21.5%
0-180°	6,368	100.0%

