

Client:	
Order #:	
Project:	
Type:	

**DESCRIPTION**

Slim wall pack is available in two sizes for a variety of applications including building perimeter, entrances, stairways and security lighting. RAWL series of luminaries provides a low-profile architectural style with the power of bright, energy efficient LEDs. It has a rugged aluminum construction with multi-mount capabilities. 0° to +90° tilt adjustments. For a building that has a modern or futuristic look.

**FEATURES**

- Sealed die-casting proyle for outdoor applications.
- Suitable for applications requiring 3G testing prescribed by ANSI C136.31.
- Light engines are available in standard 3000K/4000 K and 5000 K (70 CRI) conygrations.
- Scalable Lumen Packages from 3,500 to 10,500 Lumens.
- UV coated \*at lens provide outstanding performance, uniformity and glare control.

**PERFORMANCE DATA**

**CRI**

70+

**CCT**

3000K, 4000K, 5000K

**Projected Lifetime**

>50,000 Hours (L70)

**Dimming**

0-10V Dimming Standard,  
10% down to 100%

**Operating Temperature**

-40°C to 40°C Ambient

**Warranty**

5 year Standard  
10 year Optional

**ORDERING INFORMATION**

<b>RAWL</b>						
-------------	--	--	--	--	--	--

B		C		D		E		F		G	
<b>A</b>	<b>FIXTURE SERIES</b>			<b>C</b>	<b>CCT</b>			<b>F</b>	<b>OPTION</b>		
	RAWL				30	3000K			PC	With Photocell	
<b>B</b>	<b>WATTAGE/LUMENS</b>				40	4000K			Blank	Without Photocell	
	27	27W/3600 <sup>1</sup>		<b>D</b>	50	5000K		<b>G</b>	<b>WARRANTY<sup>2</sup></b>		
	40	40W/5200 <sup>1</sup>			U	120-277V			-	5 Year Warranty	
	67	67W/8800 <sup>1</sup>		<b>E</b>	<b>FINISH</b>				10	10 Year Warranty	
	80	80W/10500 <sup>1</sup>			BL	Black			10L	10 Year Warranty including labor	
					WH	White					
					BZ	Dark Bronze					
					CU	Custom					




<sup>1</sup>Delivered Lumens (5000K)

<sup>2</sup> 5 Year Warranty is Standard unless specified

**DIMENSIONS**




unit: mm/inch

Small size: 27W/40W




Net Weight:  
27W: 3.351lb  
40W: 3.968lb

Medium size: 67W/80W



Net Weight:  
67W: 7.319lb  
80W: 7.804lb

**PHOTOMETRICS**

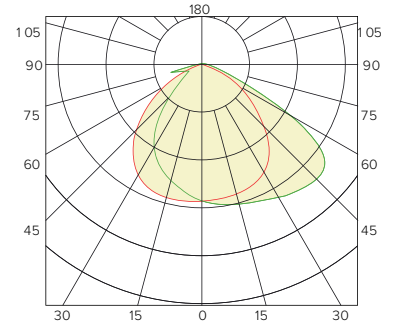

**ACCESSORIES**



Photocell

No. RAWL

USE: Photocell is field installed or pre-installed in factory by requesting

**Mounting**

0° to +90° tilt adjustments.  
To meet the needs of customers with different lighting angles.



**Housing**

Suitable for both indoor and outdoor application, also suitable for J-BOX mounting and surface mounting.



**Photocell**

Optional for photocell, and allows for security and energy saving.

**Lens**

Polycarbonate optical lens with UV stabilizers do not exhibit yellowing and deformation.

**PERFORMANCE DATA**

SYSTEM WATTS	VOLTAGE	CRI	LUMENS (3000K)	LPW (3000K)	LUMENS (4000K)	LPW (4000K)	LUMENS (5000K)	LPW (5000K)
27W	120-277VAC	70	3500lm	130 lm/W	3600lm	133 lm/W	3600lm	133 lm/W
40W	120-277VAC/347-480V	70	5000lm	125 lm/W	5200lm	130 lm/W	5200lm	130 lm/W
67W	120-277VAC/347-480V	70	8600lm	128 lm/W	8800lm	131 lm/W	8800lm	131 lm/W
80W	120-277VAC	70	10000lm	125 lm/W	10500lm	131 lm/W	10500lm	131 lm/W

**ELECTRICAL DATA**

Number Of Drivers	Driver Current (mA)	Nominal Power (W)	INPUT VOLTAGE (V)	CURRENT (Amps)
1	430	27	120	0.23
		27	208	0.13
		27	240	0.11
		27	277	0.10
1	640	40	120	0.33
		40	208	0.19
		40	240	0.17
		40	277	0.14
1	1110	67	120	0.56
		67	208	0.32
		67	240	0.28
		67	277	0.24
1	2120	80	120	0.67
		80	208	0.38
		80	240	0.33
		80	277	0.29

