



Client:	
Order #:	
Project:	
Type:	

**PERFORMANCE DATA**

**CRI**

70+

**CCT**

3000K, 4000K, 5000K

**Projected Lifetime**

>50,000 Hours (L70)

**Dimming**

0-10V Dimming Standard,  
10% down to 100%

**Operating Temperature**

-40°C to +50°C Ambient

**Warranty**

5 year Standard  
10 year Optional

**DESCRIPTION**

TUFO is a compact, round, budget-friendly high bay that combines great performance with premium aesthetics. The stylish exterior design is very adaptable and can be seamlessly integrated into various environments without being obtrusive. The unique structural design provides maximum durability and reliability, while supporting Hook, Pendant, and surface three installation methods, replacing MH up to 1000W. Each model of the TUFO series supports color temperature adjustment, and 4 positions wattage regulation, reducing product stocking budgets. Optional for Emergency and Sensor. It's ideal for a variety of commercial and industrial lighting applications such as warehouses, manufacturing, and stadiums.

**FEATURES**

- Casting thermally conducts LED heat to optimize performance and long life.
- Light engines are available in color tunable version, the CCT can be changed to three CCTs (3000K, 4000K, 5000K) or two CCTs (4000K, 5000K).
- Scalable Lumen Packages from 6,000 to 40,000 Lumens.
- Anti-UV prismatic translucent lens is designed to shape the light uniformly and controls the glare light.
- With corrosion-resistant powder coating that provides protection and architectural appearance while adapting well to the environment.



**ORDERING INFORMATION**

<b>TUFO</b>							
-------------	--	--	--	--	--	--	--

	<b>B</b>	<b>C</b>	<b>D</b>	<b>E</b>	<b>F</b>	<b>G</b>	<b>H</b>
<b>A</b>	<b>FIXTURE SERIES</b>						
	TUFO						
<b>B</b>	<b>WATTAGE/LUMENS</b>						
	100	100W/14500 <sup>1</sup>					
	150	150W/22500 <sup>1</sup>					
	160	160W/27000 <sup>1</sup>					
	210	210W/30500 <sup>1</sup>					
	230	230W/35000 <sup>1</sup>					
	235	235W/40000 <sup>1</sup>					
<b>C</b>	<b>CCT</b>						
			30	3000K			
			40	4000K			
			50	5000K			
<b>D</b>	<b>VOLTAGE</b>						
			U	120-277V			
			H	347-480V			
<b>E</b>	<b>FINISH</b>						
			WH	White			
			BZ	Dark Bronze			
			BL	Black			
<b>F</b>	<b>OPTIONS</b>						
	AF	Aluminum Reflector					
	PCR	Pc Reflector					
	EM	Emergency Battery					
	MSP	Plug and play PIR Sensor					
	MSBM	Plug and Play Bluetooth Microwave Sensor					
<b>G</b>	<b>MOUNTING</b>						
	HM	Hook Mount					
	CPM	Conduit Pendant Mount					
	BM	U-Bracket Mount					
<b>H</b>	<b>WARRANTY<sup>2</sup></b>						
	-	5 Year Warranty					
	10	10 Year Warranty					
	10L	10 Year Warranty including labor					

<sup>1</sup>Delivered Lumens (5000K)

<sup>2</sup> 5 Year Warranty is Standard unless specified

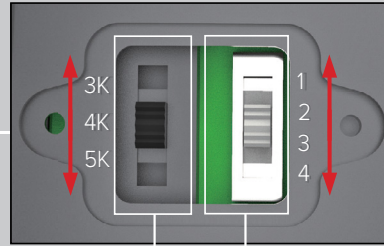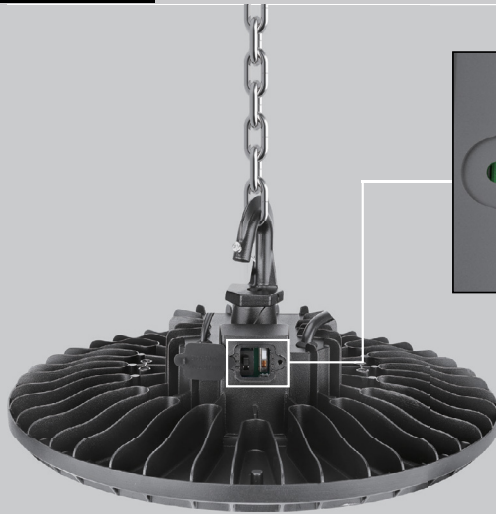

**CCT AND WATTAGE SELECTABLE**  
This fixture has the function of adjusting the lumens output and color temperature on-site.

**CCT SELECT**

3000K 4000K 5000K

Offer three CCT adjustable (3000K, 4000K, 5000K) or two CCT adjustable (4000K, 5000K)

**WATTAGE SELECT**

40% 60% 80% 100%

Each model supports 4 positions wattage regulation : 100%, 80%, 60%, 40%

**ELECTRICAL DATA**

NUMBER OF DRIVERS	DRIVER CURRENT (mA)	NOMINAL POWER (W)	INPUT VOLTAGE (V)	CURRENT (Amps)
1	800	100	120	0.83
		100	208	0.48
		100	240	0.42
		100	277	0.36
		100	347	0.29
		105	347	0.30
		105	480	0.22
1	1150	150	120	1.25
		150	208	0.72
		150	240	0.63
		150	277	0.54
		150	347	0.43
		155	347	0.45
		155	480	0.32
1	1280	160	120	1.33
		160	208	0.77
		160	240	0.67
		160	277	0.58
		160	347	0.46
		165	347	0.48
		165	480	0.34
1	1700	210	120	1.75
		210	208	1.01
		210	240	0.88
		210	277	0.76
		210	347	0.61
		215	347	0.62
		215	480	0.45
1	1750	230	120	1.92
		230	208	1.11
		230	240	0.96
		230	277	0.83
		230	347	0.66
		235	347	0.68
		235	480	0.49
1	1850	235	120	1.96
		235	208	1.13
		235	240	0.98
		235	277	0.85
		235	347	0.68
		240	347	0.69
		240	480	0.50

**PERFORMANCE DATA**

TUFO 100W								
SETTING	SYSTEM WATTS	CRI	3000K		4000K		5000K	
			LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
100%	100W	70	14000lm	140 lm/W	16000lm	160 lm/W	14500lm	145 lm/W
80%	80W	70	11600lm	145 lm/W	13000lm	163 lm/W	12000lm	150 lm/W
60%	60W	70	9000lm	150 lm/W	10000lm	167 lm/W	9400lm	157 lm/W
40%	40W	70	6200lm	155 lm/W	7000lm	175 lm/W	6500lm	163 lm/W

TUFO 150W								
SETTING	SYSTEM WATTS	CRI	3000K		4000K		5000K	
			LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
100%	150W	70	22000lm	147 lm/W	24000lm	160 lm/W	22500lm	150 lm/W
80%	120W	70	18000lm	150 lm/W	20000lm	167 lm/W	19000lm	158 lm/W
60%	90W	70	14000lm	156lm/W	15500lm	172 lm/W	14600lm	162 lm/W
40%	60W	70	9800lm	163 lm/W	10800lm	180 lm/W	10000lm	167 lm/W

TUFO 160W								
SETTING	SYSTEM WATTS	CRI	3000K		4000K		5000K	
			LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
100%	160W	70	25500lm	159 lm/W	28000lm	175 lm/W	27000lm	169 lm/W
80%	128W	70	21200lm	166 lm/W	22800lm	178 lm/W	22000lm	172 lm/W
60%	96W	70	16500lm	172 lm/W	17500lm	182 lm/W	17000lm	177 lm/W
40%	64W	70	11300lm	177 lm/W	12000lm	188 lm/W	11600lm	181 lm/W


TUFO 210W								
SETTING	SYSTEM WATTS	CRI	3000K		4000K		5000K	
			LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
100%	210W	70	30200lm	144 lm/W	32000lm	152 lm/W	30500lm	145 lm/W
80%	168W	70	24500lm	146 lm/W	26500lm	158 lm/W	25000lm	149 lm/W
60%	126W	70	19000lm	151 lm/W	21000lm	167 lm/W	20000lm	159 lm/W
40%	84W	70	13500lm	161 lm/W	14500lm	173 lm/W	14000lm	167 lm/W

TUFO 230W								
SETTING	SYSTEM WATTS	CRI	3000K		4000K		5000K	
			LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
100%	230W	70	34000lm	148 lm/W	36000lm	157 lm/W	35000lm	152 lm/W
80%	184W	70	28000lm	152lm/W	30000lm	163 lm/W	29000lm	158 lm/W
60%	138W	70	22000lm	159 lm/W	24000lm	174 lm/W	23000lm	167 lm/W
40%	92W	70	15500lm	168 lm/W	16500lm	179 lm/W	16000lm	174 lm/W


TUFO 235W (Single CCT only)								
SETTING	SYSTEM WATTS	CRI	3000K		4000K		5000K	
			LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
100%	235W	70	37000lm	157 lm/W	40000lm	170 lm/W	40000lm	170 lm/W
80%	188W	70	31000lm	165 lm/W	33000lm	176 lm/W	33000lm	176 lm/W
60%	141W	70	24000lm	170 lm/W	25500lm	181 lm/W	25500lm	181 lm/W
40%	94W	70	16500lm	176 lm/W	17500lm	186 lm/W	17500lm	186 lm/W

**DIMENSION**

unit: mm/inch

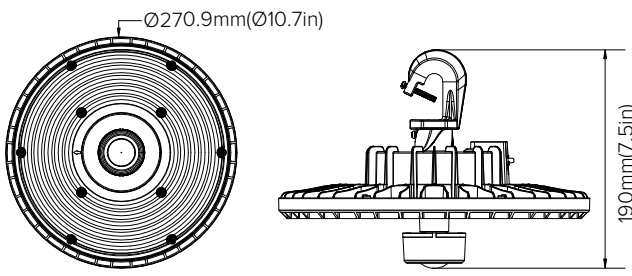

100W/150W/160W

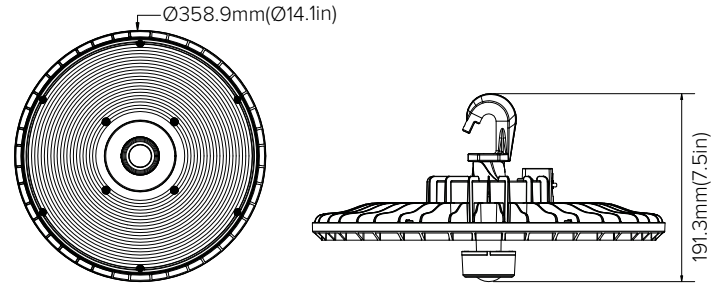

210W/230W/235W

**MOUNTING**



Hook Mount





Conduit Pendant Mount



U-Bracket Mount

**PHOTOMETRICS**

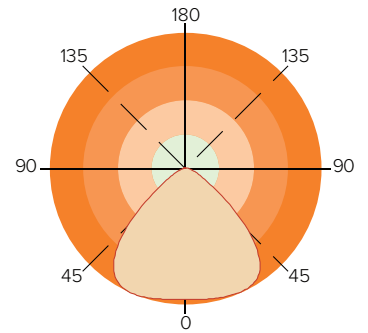

Emergency Battery  
25W 3500lm 90min,  
suit for 210W, 230W.  
16W 2000lm 90min,  
suit for 100W 150W 160W



Plug-and-Play PIR Sensor  
PIR sensor  
Bluetooth PIR sensor



Plug-and-Play  
Microwave Sensor  
Bluetooth microwave  
sensor



U-Bracket  
Use for surface mount



Aluminum Reflector



Pc Reflector

**Emergency Battery**  
25W 3500lm 90min

**Installation accessory**  
Available for both hook mount, conduit mount and surface mounting with U-bracket(optional).  
U-bracket allows to adjust the direction to illuminate any area you need.

**Transformer BOX**  
Transformer can be easily added into the Junction-box and convert to HV models, reducing SKUs and inventory pressure.

**Housing**  
Rugged die-cast housing with corrosion-resistant powder coating

**Plug-and-Play Sensor (optional)**  
Sensor allows for security and energy saving.

*Install in 3-Seconds*