



Client:	
Order #:	
Project:	
Type:	

DESCRIPTION

Introducing the NWRTL-KIT, a revolutionary and highly efficient door frame retrofit kit that offers easy installation and a cost-effective solution for upgrading fluorescent troffers or parabolics to LED technology. Perfect for commercial applications such as offices, classrooms, healthcare facilities, and retail spaces, this retrofit kit features standard dimming and showcases the most advanced LED technology with an efficacy of 140 lumens per watt. Seamlessly integrating with a networked lighting control (NLC) system for enhanced functionality, it is DLC Premium listed for utility rebates. The Vortex-kit, providing a simpler and quicker solution than piece-style retrofit kits, can be installed in just 3-5 minutes.

FEATURES

- UL Listed
UL 1598 Suitable for damp locations
- IESNA LM79 & LM-80 Testing
Paclights LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.
- DLC Qualification
Selected models of this product are on the Design Lights Consortium (DLC) Qualified Products List and are eligible for rebates from DLC Member Utilities. To view our DLC qualified products.
- LEDs
Long-life, high-ecacy, surface-mount LEDs
- Housing
Durable cold rolled steel housing provides strength and uniformity. Luminaire is pre-painted to enhanced smooth finish.
- Installation
Replace existing 2x2, 2x4, 1x4 recessed troffers, by utilizing the existing fixture housing. The kit provides all the components needed to perform the change out, completely assembled within the frame. The kit fits for both air return troffers and standard troffers.
- Green Technology
Mercury and UV free, and RoHS compliant. Polyester powder coat finish formulated without the use of VOC or toxic heavy metals.

PERFORMANCE DATA

CRI
80+

CCT
3000K, 3500K, 4000K, 5000K

Projected Lifetime
>100,000 Hours (L70)

Dimming
0-10V Dimming Standard, 10% down to 100%

Operating Temperature
-20°C to +45°C Ambient

Warranty
5 year Standard
10 year Optional

ORDERING INFORMATION

NWRTL-KIT							
------------------	--	--	--	--	--	--	--


	B	C	D	E	F	G	H
A	FIXTURE SERIES		D		G		
	NWRTL-Kit		CCT		EM Emergency		
B	SIZE		30	3000K	H		
	14	1' x 4'	35	3500K	WARRANTY²		
	22	2' x 2'	40	4000K	-	5 Year Warranty	
	24	2' x 4'	50	5000K	10	10 Year Warranty	
C	WATTAGES/LUMENS (1' x 4')		E		10L		
	30	30W/3840 ¹	VOLTAGE		10 Year Warranty including labor		
	WATTAGES/LUMENS (2' x 2')		UNV				
	30	30W/3840 ¹	F				
	WATTAGES/LUMENS (2' x 4')		FINISH				
	45	45W/5760 ¹	WH				
			White				

¹ Delivered Lumens (5000K)
² 5 Year Warranty is Standard unless specified




TECHNICAL SPECIFICATIONS Continued

THE KIT

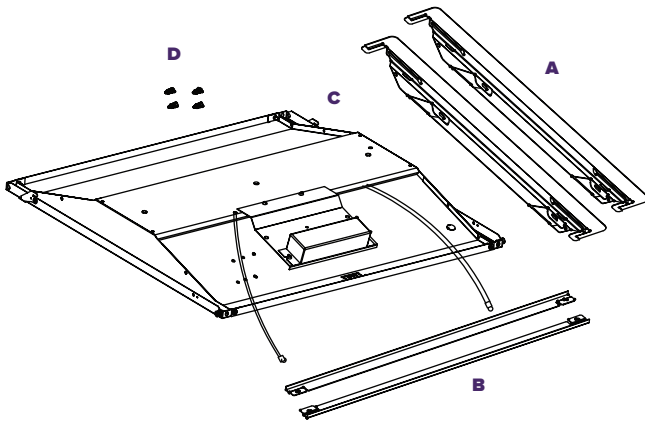

KIT COMPONENTS	QTY
A. End Plates	2
B. Side Plates	2
C. Door Assembly Body	1
D. Self-tapping Screws	4

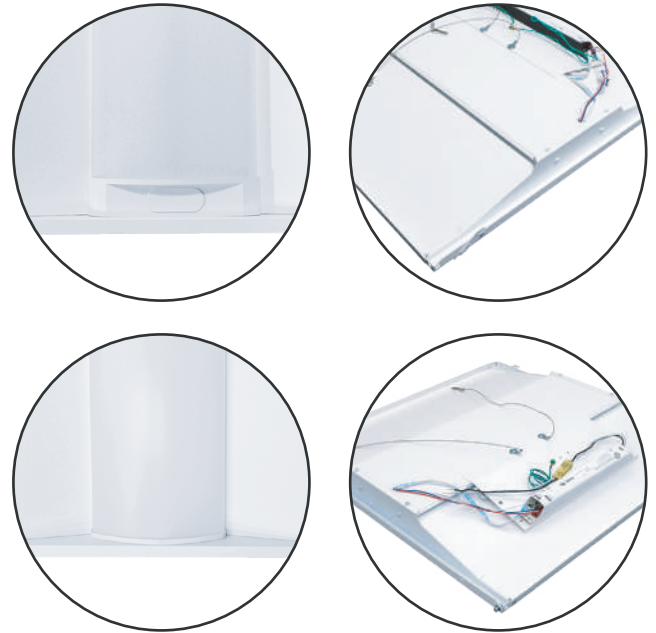


RETROFIT

NWRTL-KIT series LED troffer retrofits comes completely assembled as a lensed kit. It requires only a few minutes to install, reduces labor costs compared with installing the whole new fixture, and reduces waste.

The Troffer Retrofit Kit provides the ideal way to replace existing 2x2, 2x4, 1x4 recessed troffers, by utilizing the existing fixture housing. The kit provides all the components needed to perform the change out quickly and efficiently, allowing for system upgrades without disturbing the ceiling.

The LED troffer retrofit is completely assembled within the frame. With its special design, the kit fits for both air return troffers and standard troffers.

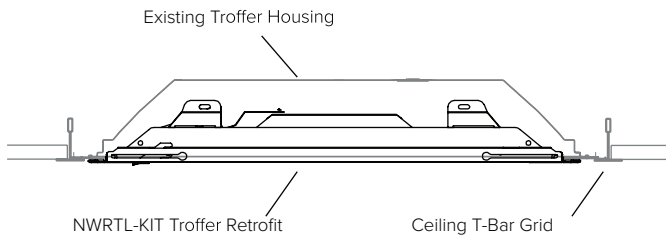


Existing Troffer Housing	Required Housing Inner Height
2' x 2'	78mm (3-1/16 in)
2' x 4'	78mm (3-1/16 in)
1' x 4'	100mm (3-15/16 in)



TECHNICAL SPECIFICATIONS Continued


NWRTL-Kit - (2x2 Ft)

Weight 8.7 lbs

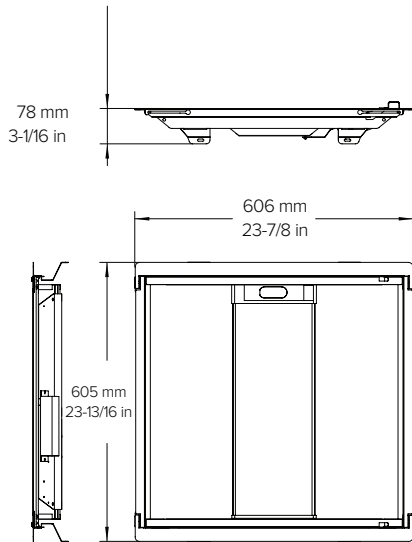


NWRTL-Kit - (2x4 Ft)

Weight 14.1 lbs

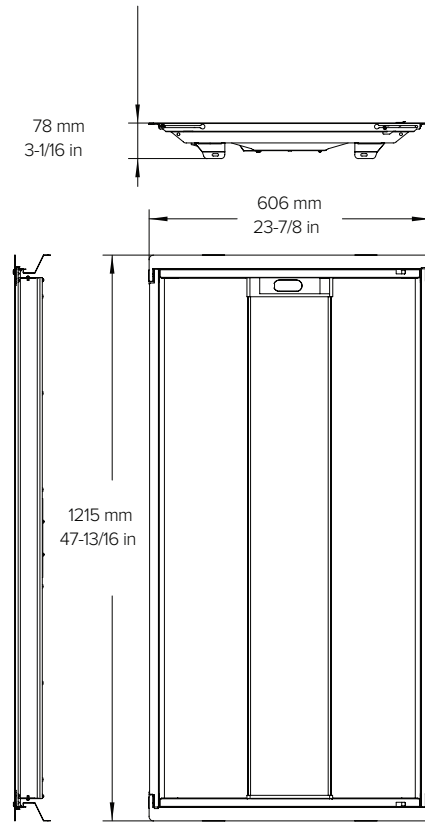

NWRTL-Kit - (1x4 Ft)

Weight 8.1 lbs

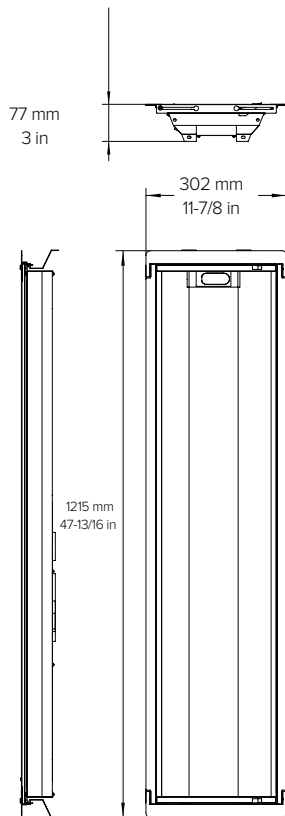

FIELD ADJUSTABLE Standard

APP-ADJUSTABLE CCT & LUMEN



**OUTPUT & CCT
FIELD
ADJUSTABLE**

Trim to the desired output lumen by percentage, or select light color temperature by using the smart device APP.

CCT can be adjusted to 3000/3500/4000/5000K, and lumen output (high trim) can be set to as low as 50%.

EMERGENCY BACKUP Optional

EMERGENCY BACKUP (-EM)



**EMERGENCY
BACKUP
OPTION**

NWRTL-Kit series emergency backup models works out of the box to save time and cost in the installation. When there is a power outage, the emergency backup driver and battery will power the LEDs of RKTN to an brightness of 1,200 lumen for at least 90 mins.

Note: -EM option will not provide battery backup for RKTN intergrated bluetooth networked components, a RTC device (purchased separately) is recommended per zone if scheduling function is required, otherwise a local time sync (using the smart device APP) will be required after each power outage.

CONTROL Standard

Networked Lighting Controls



**NLC
NETWORKED
CONTROL OPTION**

All models of NWRTL-Kit are Bluetooth Networked Control (NLC) Enabled.

Network Lighting Controls (NLC) offer Luminaire Level Lighting Control (LLLC) based on Bluetooth-enabled Mesh Networking of Luminaires. Individual addressability enables luminaires to be communicated with each other within the zone/network. Luminaires can be grouped, trim and controlled by using the smart device app or connected wall switches. Scheduling, scene and sensors can be added for automation among the lights within the zone/group.



iOS/Andriod APP will be used to commissioning or customize settings of the networked controls.



(-WBP) Optional plug-and-play PIR occupancy and daylight harvesting sensor.

PERFORMANCE

NWRTL-Kit - (2x2 Ft)

30W	3000K Warm	3500K Warm	4000K Neutral	5000K Daylight
LUMENS	3,750	3,780	3,810	3,840
LM/W	125	126	127	128

NWRTL-Kit - (2x4 Ft)

45W	3000K Warm	3500K Warm	4000K Neutral	5000K Daylight
LUMENS	5,625	5,670	5,715	5,760
LM/W	125	126	127	128

NWRTL-Kit - (1x4 Ft)

30W	3000K Warm	3500K Warm	4000K Neutral	5000K Daylight
LUMENS	3,750	3,780	3,810	3,840
LM/W	125	126	127	128

* Max lumen values are shown for each CCT, can be trimmed to the desired output lumen (by percentage) in the App.

NETWORKED CONTROLS MADE EASY

Keilton Networked Controls, a DLC® Qualified Networked Lighting Controls Product, make it easy for facilities to save energy, improve occupancy comfort and achieve code compliance by adding Luminaire Level Lighting Controls (LLLC) to indoor and outdoor applications. It allows for easy field installation of sensors and network nodes with selected PacLights controls ready fixtures. Using the Keilton app, nodes can be commissioned without the need for a gateway or internet access.


Keilton®




A Cost-Effective Decentralized Architecture
Direct Mobile Device Provisioning
Best-In-Class Scale, Performance & Reliability



INSTALL



COMMISSION




CONTROL




FEATURES

- Luminaire Level Lighting Control (LLLC)
- Bluetooth-enabled Mesh Networking of Luminaires and Devices
- Individual Addressability, address individual or multiple luminaires
- High-end and Low-end Trim
- Zoning & Grouping
 - ◊ Add and control up to 100 devices per zone
 - ◊ Add unlimited zones to scale for bigger installation
 - ◊ Create unlimited groups (combination of sensor or network nodes) within a zone
 - ◊ Link and control the whole group or zone
- Scene control
 - ◊ Create and link scenes to individual lights or groups within a zone
 - ◊ Select scene with App or wall switch
- Time Scheduling for individual lights, groups or scenes
- Sensors integrated with BLE, occupancy and daylight sensing
- Multi-level Dimming, Daylight Harvesting and Occupancy controls
- Manual/Automatic ON/OFF and Automatic partial ON/OFF control capability
- Control via smart device App or wireless wall switch
- Secure commissioning with Keilton App
- Up to 100 ft node-to-node and 50 ft node-to-device
- Other control features to meet code compliance

OPTIONAL SENSOR ADD-ON



SKU	DESCRIPTION	FUNCTION	OPTION ORDER CODE
KEILTON-IFS108E	 KEILTON IFS108E ECO PIR DLH SENSOR	Enable sensor functionality to a NLC node - PIR occupancy & daylight (harvesting) sensing.	-WBP

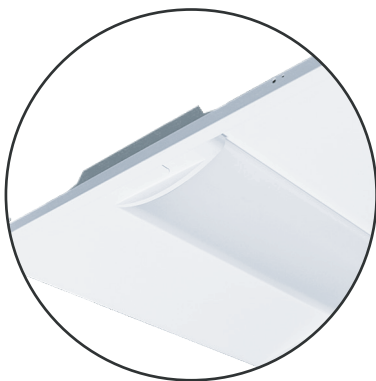

without sensor





with sensor installed

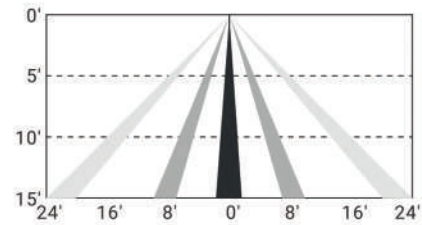



Height 15ft


COMMISSION & CONTROL SMART DEVICE APP



NETWORKED WALL SWITCH

SKU	DESCRIPTION	FUNCTION	APPLICATION
KEILTON-WP1025	 <p>KEILTON WP1025 BATTERY 5 BUTTON BLUETOOTH DIMMER SWITCH W/ SCENE CONTROLLER</p>	<p>Switch on/off, dim, or select up to 3 scenes, of an individual light or a group of lights (defined in the commissioning App). Battery powered.</p>	<p>Field installed, ideal for flexible or additional wall switch placement, indoor</p>
KEILTON-WP1017S	 <p>KEILTON WP1017S AC 7 BUTTON BLUETOOTH DIMMER SWITCH W/ SCENE CONTROLLER</p>	<p>Switch on/off, dim, or select up to 4 scenes, of an individual light or a group of lights (defined in the commissioning App). 120-277v AC powered.</p>	<p>Field installed, ideal for retrofitting existing wall switch, neutral wire (AC) is required, indoor</p>

OTHER

SKU	DESCRIPTION	FUNCTION	APPLICATION
KEILTON-CR01	 <p>KEILTON CR01 ENERGY MONITORING USB DONGLE W/ RTC</p>	<p>Records energy consumption of the assigned Zone. Offers real-time-clock (RTC) Sync of the Zone. USB (5v) powered, internal battery for RTC.</p>	<p>Field installed, one per Zone to satisfy energy audit, or to provide off-the-App time/schedule recovery from power-outage of the site.</p>