



Client:	
Order #:	
Project:	
Type:	

PERFORMANCE DATA

CRI

80+

CCT

3500K, 4000K, 5000K

Projected Lifetime

>100,000 Hours (L70)

Dimming

0-10V Dimming Standard, 10% down to 100%

Operating Temperature

-30°C to 50°C Ambient

Warranty

5 year Standard 10 year Optional

DESCRIPTION

The REVT series Vapor Tight xture withstands rugged environments and is available in 4-foot and 8-foot lengths. The xture housing is made of clean and pure PC material with excellent stability and durability, and a stainless steel clip for easy disassembly and installation. With the ability to switch lumens and adjust color temperature in one xture, greatly reducing SKUs. Emergency Battery Back Up and sensor options are available. The REVT series vapor tight is ideal solutions for outdoor venues, canopies and locker rooms.

FEATURES

- Closed housing is ealed against moisture and environmental contaminants.
- Stainless steel clamp design, convenient assembly and separation of lamp body.

90W/125001

• 4 feet and 8 feet are available.

- Up to 90W output 12800 lumens.
- Adjustable lumen output with three lumen gears LV1, LV2, LV3
- Switchable color temperature 3500K/4000K/5000K.

ORDERING INFORMATION

REVT									
	В	С	D	E	F	'	G		
FIXTURE SERIES			c cct	с сст		F SENSOR (OPTION)			
REVT	/T		35	3500K		Blank	Without Sensor		
WATTAGE/LU	ATTAGE/LUMENS 4FT		40	4000K		М	Motion Sensor	ensor	
25	25W/3560 ¹	50	5000K	G	WARRANTY ²				
35			VOLTAGE			-	5 Year Warranty 10 Year Warranty		
50			U	U 120-277V		10			
WATTAGE/LUMENS 8FT			E FINIS	E FINISH		10L	10 Year Warranty including labor		
60	60W/8500 ¹		WH	White					
75	75W/10500 ¹								

90

¹Delivered Lumens (5000K)

² 5 Year Warranty is Standard unless specified




DIMENSION

unit: mm/inch





Net Weight: 50W: 2.75kg(6.06lbs) 90W: 5.9kg(13lbs)





POWERED BY SESPEN




PERFORMANCE DATA

REVT 50W 4FT										
SETTING	SYSTEM WATTS	3500K		4000K		5000K				
		LUMENS (80CRI)	LPW (80CRI)	LUMENS (80CRI)	LPW (80CRI)	LUMENS (80CRI)	LPW (80CRI)			
LV1	50W	6700m	134 lm/W	7100 lm	142 lm/W	6900lm	138 lm/W			
LV2	35W	4780lm	137 lm/W	5100Im	146 lm/W	4900lm	140 lm/W			
LV3	25W	3500lm	140 lm/W	3800lm	152 lm/W	3560m	1 42 lm/W			

REVT 90W 8FT										
	SETTING	SYSTEM WATTS	3500K		4000K		5000K			
			LUMENS (80CRI)	LPW (80CRI)	LUMENS (80CRI)	LPW (80CRI)	LUMENS (80CRI)	LPW (80CRI)		
	LV1	90W	1 2200lm	136 lm/W	1 2800lm	142 lm/W	1 2500lm	139 lm/W		
	LV2	75W	1 0300lm	137 lm/W	1 0800lm	144 lm/W	1 0500lm	1 40 lm/W		
	LV3	60W	8300lm	138 lm/W	8800lm	147 lm/W	8500lm	142 lm/W		

ACCESSORIES (Optional)

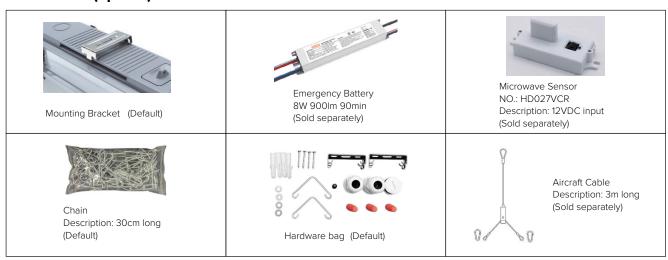

CCT AND WATTAGE SELECTABLE

This fixture has the function of adjusting the lumens output and color temperature on-site.

